

AQ5

Ultra-compact, wide angle system

features


- ▶ Very wide 120° x 60° dispersion
- ▶ Dual 5.25" (130mm) ICT™
- ▶ Light weight structural foam enclosure
- ▶ 1st & 2nd fix wall and ceiling brackets available
- ▶ Five year limited warranty

applications

- ▶ Clubs, bars and restaurants
- ▶ Theatres
- ▶ Places of worship

The ultra-compact AQ5 is equipped with two 5.25" (130mm) ICT™ (Inductively Coupled Transducer) drivers optimally splayed for smooth, very wide coverage. The AQ5's HF diaphragms are driven via inductive coupling, avoiding the tweeter burn-out commonly associated with miniature loudspeakers. ICT™ technology also eliminates the need for a crossover as the inductive coupling provides a complementary transfer function for the tweeter.

overall dimensions

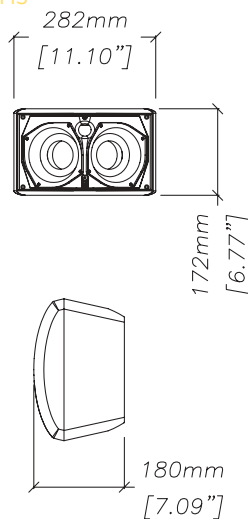

AQ5



technical specifications

| | |
|------------------------|--|
| TYPE | Ultra-compact, Dual ICT™, wide dispersion vented trapezoid |
| FREQUENCY RESPONSE (1) | 120Hz-20kHz ± 3dB |
| DRIVERS | 2 x 5.25" (130mm) ICT™ full-range drivers |
| RATED POWER (2) | 75W AES, 300W peak |
| RECOMMENDED AMPLIFIER | 75-150W into 4 ohms |
| SENSITIVITY (6) | 91dB |
| MAXIMUM SPL (7) | 109dB continuous, 115dB peak |
| NOMINAL IMPEDANCE | Externally switchable 4 or 16 ohms |
| DISPERSION (-6dB) | 120° horizontal, 60° vertical |
| CROSSOVER | ICT™ |
| ENCLOSURE | 5 litre, structural foamed ABS |
| FINISH | Textured light grey paint |
| PROTECTIVE GRILLE | Light grey perforated steel |
| CONNECTORS | Low profile 12 amp push-lock |
| FITTINGS | 4 x M6 inserts for bracket 1 x M6 insert for safety point |
| OPTIONS | 30W 100/70V line transformer |
| DIMENSIONS | (W) 282mm x (H) 172mm x (D) 180mm (W) 11.1ins x (H) 6.8ins x (D) 7.1ins |
| WEIGHT | 5kg (11lbs) |

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com